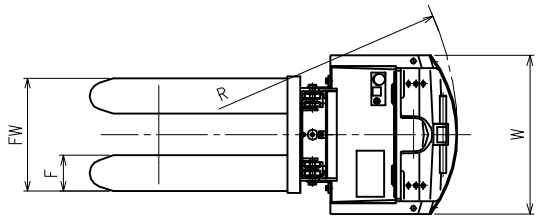

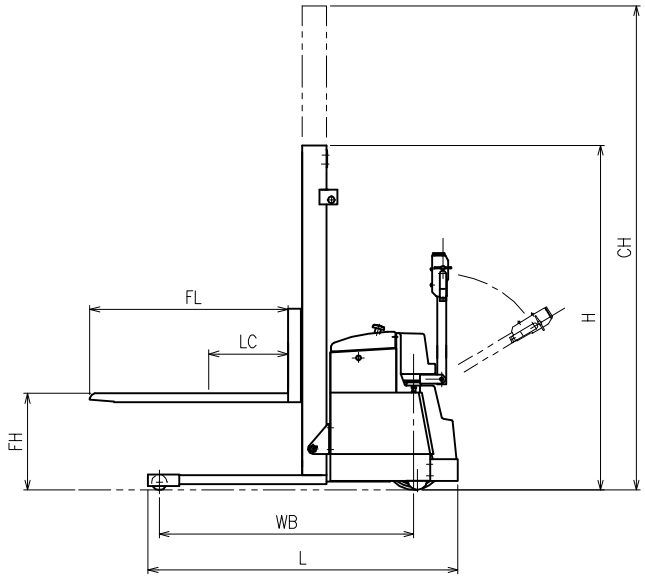

SHPC Series

Model Type		Unit	SHPC5S	SHPC5W	SHPC7S	SHPC7W	SHPC9S	SHPC9W
Maximum Load		kg	500		700		900	
Load Center	LC	mm	500					
Lifting Height	FH	mm	85～1500	85～2500	85～1550	85～2500	85～1550	85～2500
Lifting Speed	With	mm/sec	85		80		75	
	Without	mm/sec	120		120		120	
Driving Speed	With	km/h	3.7		3.5		3.3	
	Without	km/h	4.2		4.2		4.2	
Minimum Turning Radius	R	mm	R1495	R1510	R1555		R1555	
Length	L	mm	1860					
Width	W	mm	800					
Height (Fork in Lowest Position)	H	mm	1950	1740	1990	1740	1990	1740
Height (Fork in Highest Position)	CH	mm	1950	2930	1990	2930	1990	2930
Wheel Base	WB	mm	1270	1285	1330		1330	
Fork Length	FL	mm	1000					
Fork Overall Width	FW	mm	570					
Single Fork Width	F	mm	180					
Service Weight		kg	520	590	550	610	560	620
Drive Wheel		mm	ϕ280x80 (Urethane) 1piece					
Load Wheel		mm	ϕ78X70 (Urethane) 2 pieces		Φ78x70 (Urethane) 4pieces		Φ78x70 (Urethane) 4pieces	
Caster Wheel		mm	ϕ100x50 (Urethane) 2pieces					
Battery Voltage		V	24					
Battery Capacity		Ah/5HR	65		100		100	
Battery Charger			Stationary Type Automatic Battery Charger (Single Phase 100V)					
Drive Motor		kw	0.8					
Running Control			Rheostatic Control					
Hydraulic Motor		kw	1.5					